



**Data Sheet for Hino 300 Series  
Hino Cargo Truck Double Cabin  
type XZU710L-ZKMMKV (4x2)  
( Max. Load : 2,000 kg )**


Front Windshield	Heat absorbing , Laminated glass.
Seating capacity	Seven.
Front seat	4-way adjustable, driver seat , fixed back passenger seat integrated type .
Rear seat	Fixed , bench type
Seat cover	Fabric type.
Front Seatbelt	3 Point ELR ( emergency locking retractor) belt with pre-tensioner on driver and outer passenger seat. 2 point NR ( Non Retractor) belt on center passenger seat.
Rear Seatbelt	3 Point ELR ( emergency locking retractor) belt with pre-tensioner on driver and outer passenger seat. 2 point NR ( Non Retractor) belt on center passenger seat.
SRS Airbag system	Equipped ( Driver& Passenger side)
Sun visor	Equipped ( both side)
Windshield wiper	2-speed with wash intermittent.
Outside rear view mirror	Equipped.
Inside Mirror	Equipped.
Air condition	Equipped with clean air filter .
Car Audio	Radio with CD Player ( 2 speakers).
Cigar lighter	Equipped.
Door Lock	Equipped .
<b>Instrument</b>	
Speedometer	Equipped ( Km/h).
Tachometer	Equipped.
Coolant temperature gauge	Equipped.
Fuel gauge	Equipped.
Brake warning	Brake fluid level and vacuum pressure warning lamp & buzzer.
Seatbelt warning	Equipped ( driver&outer passenger seat).
Cab tilt warning lamp	Equipped ( with indicator light and buzzer).

  
ر. مهندسين أقدم  
نجم عبد شهبوي  
ر. لجنة

  
ر. مهندسين أقدم  
ماجد عزيز جبر  
عضو

  
ر. مهندسين أقدم  
محمد عباس حسين  
عضو

  
ر. مهندسين أقدم  
مخلد خليل أسماعيل  
عضو

  
ر. مهندسين أقدم  
نديم محمود شاكر  
عضو

**Data Sheet for Hino 300 Series  
Hino Cargo Truck Double Cabin  
type XZU710L-ZKMMKV (4x2)  
( Max. Load : 2,000 kg )**

<b>Rear Axle</b>	
Type	Full-floating, single reduction, single speed by hypoid gearings.
Capacity ( kg)	4,300
<b>Steering</b>	
Type	LHD, Telescopic and tilt steering column , recirculating ball integral power steering.
<b>Tire &amp; Wheel</b>	
Front & Rear	7.00R16 , rib type tread.
No. of Tires	7 ( including 1 spare tire).
Wheels	16x5.50F with 5 stud.
<b>Suspension</b>	
Front	Semi-elliptic tapered leaf springs with double acting shock absorbers.
Rear	Semi-elliptic main and auxiliary leaf spring with double acting shock absorbers.
<b>Braking System</b>	
Service Brake	Dual circuit hydraulic , vacuum assist , Disc Brakes with load sensing proportioning valve, <b>ABS Equipped.</b>
Parking Brake	Mechanical, internal expanding acting on transmission output.
Exhaust Brake	Equipped .
<b>Electrical</b>	
No. of Batteries	2 x 12 V ,60Ah .
Alternator	24 V ,60Ah.
Horn	Electric Horn.
<b>Fuel tank</b>	
Capacity	100 L
Fuel filter	Primary with ( water separator) and secondary filter .
<b>CABIN</b>	
Type	Double Cabin , Forward control, all steel welded construction , High roof , mechanical tilt with torsion assist.


ر. مهندسين اقدم  
نجم عبد شهبوي  
ر. لجنة

ر. مهندسين اقدم  
ماجد عزيز جبر  
عضو

ر. مهندسين اقدم  
محمد عباس حسين  
عضو

ر. مهندسين اقدم  
مخلد خليل اسماعيل  
عضو

ر. مهندسين اقدم  
تديم محمود شاكر  
عضو

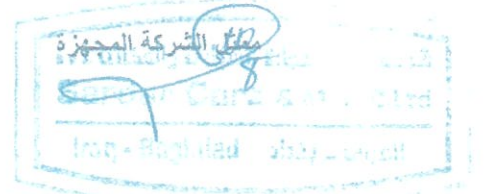

**Data Sheet for Hino 300 Series  
Hino Cargo Truck Double Cabin  
type XZU710L-ZKMMKV (4x2)  
( Max. Load : 2,000 kg )**

Chassis Model: Hino 3614	
Chassis Code : XZU710L-ZKMMKV	
Country of Manufacturer : Japan for Chassis and Cargo body	
<b>Dimensions</b>	<b>mm</b>
Overall Length ( OL)	6,170
Overall Width ( OW)	2,180
Overall Height (OH)	2,310
Wheel base (WB)	3,430
<b>Weights</b>	<b>Kg</b>
Vehicle mass	2,910
Loading capacity ( Payload )	2,000
Gross Vehicle Mass ( GVMR)	5,365
<b>Engine</b>	
Model & Emission	HINO N04C-WG – EURO3
Type	Diesel ,Turbocharged and intercooled , 4cycle , inline 4 Cylinder, overhead valve , water cooled . Suitable for weather and dusty area in Iraq & local fuel.
Combustion system	Compression ignition , Four Stroke .
Displacement (L)	4.009 L
Compression ratio	18.0 : 1
Maximum Power /Speed	102 kW ( 139PS) @2,500 rpm (JIS Gross). 100 kW ( 136PS) @2,500 rpm (ISO Net).
Maximum Torque /Speed	394 Nm ( 40.2kgfm) @1,600 rpm (JIS Gross). 392 Nm ( 40.0kgfm) @1,600 rpm (ISO Net).
Fuel System(Fuel injection pump)	Electronic control common rail type.
<b>Clutch</b>	
Type	Dry single plate with damper springs , facing out side diameter 300mm, automatic gap adjuster .
<b>Gear Box</b>	
Model	RE50, manual 5 speed , with overdrive.
<b>Axles</b>	
<b>Front Axle</b>	
Type	Reversed Elliot, " I " section beam.
Capacity ( kg)	2,660


ر. مهندسين اقدم  
نجم عبد شهبوي  
ر. لجنة

ر. مهندسين اقدم  
ماجد عزيز جبر  
عضو

ر. مهندسين اقدم  
محمد عباس حسين  
عضو

ر. مهندسين اقدم  
مخلد خليل اسماعيل  
عضو

ر. مهندسين اقدم  
نديم محمود شاكر  
عضو

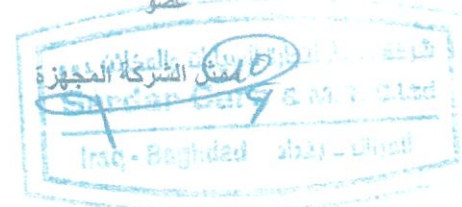

Data Sheet for Hino 300 Series  
Hino Cargo Truck Double Cabin  
type XZU710L-ZKMMKV (4x2)  
( Max. Load : 2,000 kg )

ملاحظة: الجزء التخصصي تترك قبول مواصفاته الى الجهة المستفيدة و ليس من مسؤولية اللجنة

**Rear Body Specifications**  
**CARGO TRUCK (WOODEN BODY TYPE)**

**SPEC. NO.** : TE-20003 **MAKE** : Hino Motors, Ltd.  
**DRAWING NO.** : CDRXZ043A **CHASSIS MODEL** : Hino XZU710L -ZKMMKV

**GENERAL**

The cargo truck is designed for transporting general cargo.

**CAPACITY**

Max. loading capacity 2,000 kg

**LOAD**

Suitable load General cargo

**CONSTRUCTION & DIMENSIONS**

**BODY**

Construction Wooden construction with three opening gates

**Dimensions (Inside)**

Length 3,250 mm  
Width 2,084 mm  
Height 380 mm

**Material, Size**

Main frame Rectangle steel tube 60 mm x 60 mm  
Cross frame Press steel 90 mm x 67 mm  
Floor  
Floor frame Press steel 2.3 mm  
Floor board Wood 14.0 mm

**Front guard**

Outside post Press steel 2.6 mm  
Inside post Steel angle 30.0 mm x 45.0 mm x 1.6 mm  
Upper rail Press steel 2.3 mm  
Header board Wood 12.0 mm

**Side gate**

Top rail Press steel 2.6 mm  
Side post Press steel 1.6 mm  
Outside panel Press steel 0.6 mm  
Inside panel Wood 12.0 mm

**Rear gate**

Top rail Press steel 2.6 mm  
Side post Press steel 1.6 mm  
Outside panel Press steel 0.6 mm  
Inside panel Wood 12.0 mm


ر. مهندسين أقدم  
نجم عبد شهوبي  
ر. لجنة

ر. مهندسين أقدم  
ماجد عزيز جبر  
عضو


ر. مهندسين أقدم  
محمد عباس حسين  
عضو


ر. مهندسين أقدم  
مخلد خليل أسماويل  
عضو

ر. مهندسين أقدم  
نديم محمود شاكر  
عضو

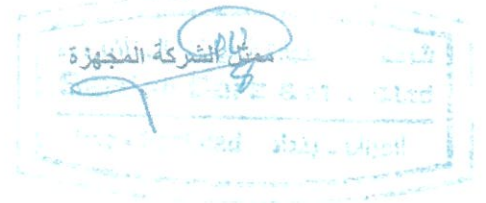


Data Sheet for Hino 300 Series  
Hino Cargo Truck Double Cabin  
type XZU710L-ZKMMKV (4x2)  
( Max. Load : 2,000 kg )

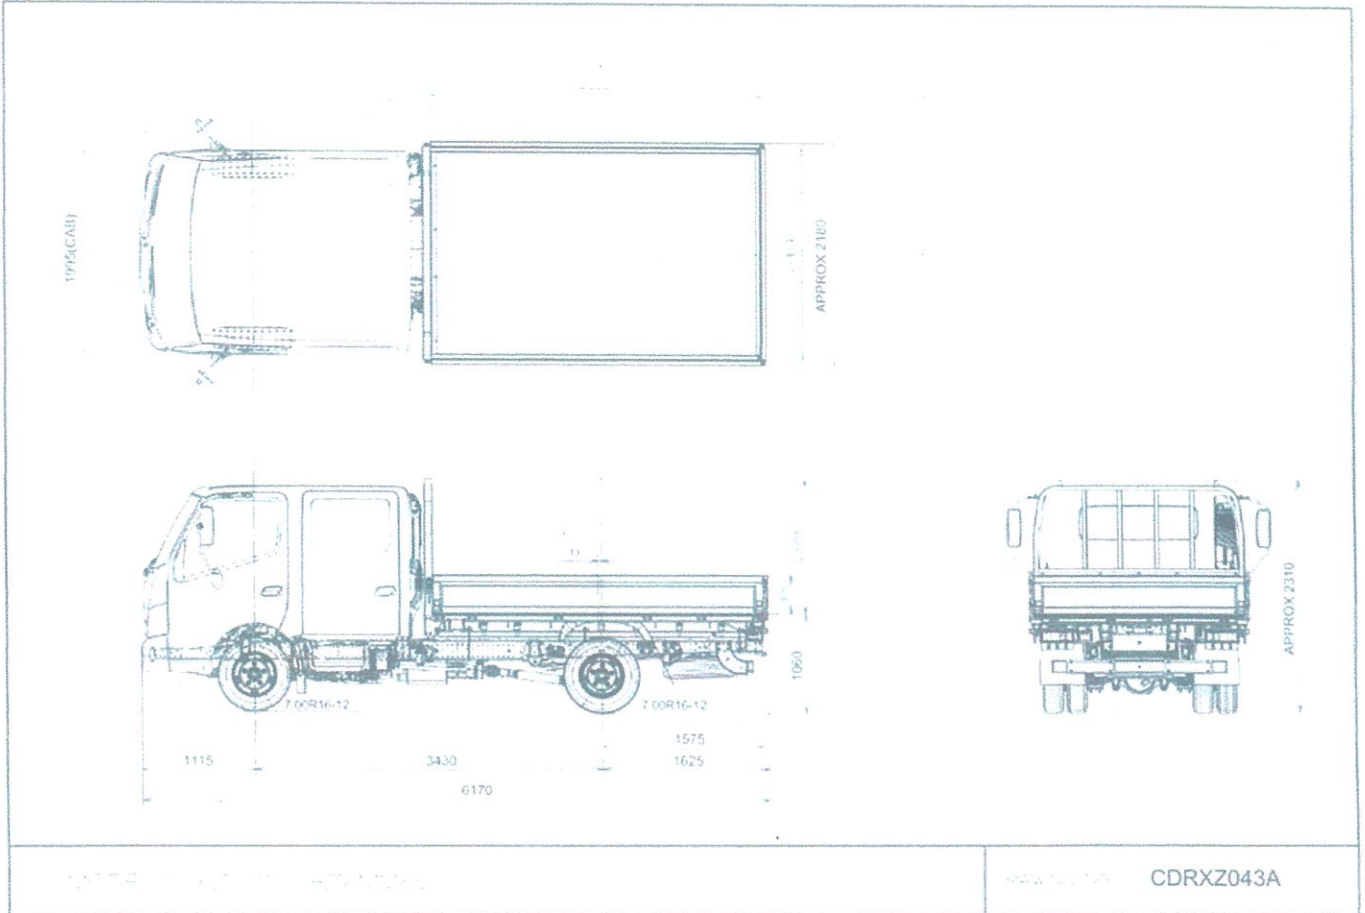


C.C.C  
  
ر. مهندسين أقدم  
نجم عيد شهوبي  
ر. لجنة

  
ر. مهندسين أقدم  
ماجد عزيز جبر  
عضو

  
ر. مهندسين أقدم  
محمد عباس حسين  
عضو

  
ر. مهندسين أقدم  
مخلد خليل أسماعيل  
عضو

  
ر. مهندسين أقدم  
نديم محمود شاكر  
عضو

